

LARUE

Detachable snowblower



DB35

Industrial Class



Industrial class


Features

- Dual stage ribbon type
- Industrial design
- Great front visibility from cab
- Tilt over engine cowling providing a superior access
- High efficient performance
- Electronic controlled Diesel engine
- High capacity fuel tank to complete a full shift
- Hydraulic chute functions: rotation + deflector
- Independent hydraulic system
- In-cab ergonomic controls and engine information
- High quality electrical quick connector
- Transmission with *maintenance free* clutch
- Low maintenance mechanical components
- No chain or belt drive
- Drive train with all *spline type* shafts
- No adjustment required on all drive train (such chain)
- Easy access to main safety bolt flange
- Left hand side radiator
- Chute casting distance: up to 23 m (75 ft.)
- Opened conveyor sides
- Replaceable scraper blade and carbide skates
- Quick attach (loader coupling) for any loader make
- Serrated ribbon flights
- Tilt chute (to the right)
- Recommended wheel loader size: 1.0 - 2.0 yd³



Options

- Chute extension 0.6 to 1.2 m (24 - 48 in) – Conveyor protecting side plates
- Remote engine oil filter – Quick reset protecting system (Flip Flange)
- Front raising deflector

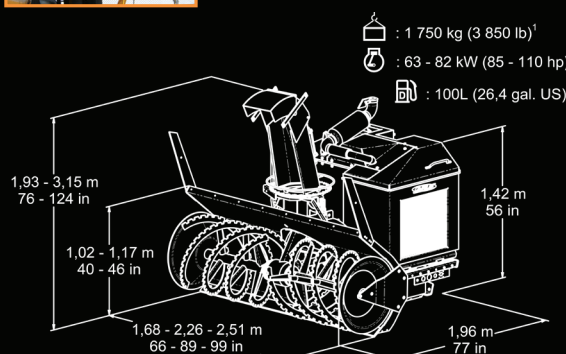

- : 1 750 kg (3 850 lb)¹
- : 63 - 82 kW (85 - 110 hp)
- : 100L (26.4 gal. US)

Notes:

1. Varies with options, measured without fuel.

Due to continuous improvement, the specifications in this brochure may change without prior notice.

For more information, please contact the manufacturer J.A. Larue Inc. or your local distributor.

Your authorized distributor:

Deposit brand 1999, all right reserved | Manufactured by: **J.A. Larue Inc.**
 660, Lenoir, Québec (Québec) Canada G1X 3W3
 Tel: **418 658-3003** | Toll free: 1-877-658-3013 | Fax: 418-658-6799
 Web site: **www.jalarue.com** | E-mail: **jalarue@jalarue.com**